




固安震®

YS-BS SPRING MOUNT

Specification Table

Model	Dimensions(mm)						Deflection (mm)
	A	B	C	D	E	H	
YS-BS	156	126	74	12	108	118	25
YS-BS	210	170	86	14	149	151	25
YS-B40	210	170	86	14	149	151	40
YS-BS50	156	126	74	12	108	118	50

Structure

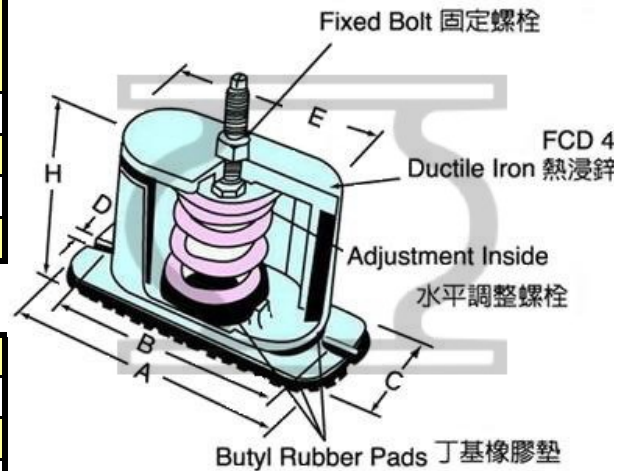

YS-B.YS-B40

Model	Load Range(KGS)	Color
YS-30B/YS-30B40	30	Cyan
YS-50B/YS-50B40	50	Cyan
YS-100B/YS-100B40	100	Darkblue
YS-150B/YS-150B40	150	Azure
YS-200B/YS-200B40	200	Red
YS-250B/YS-250B40	250	Pink
YS-300B/YS-300B40	300	Darkgreen
YS-350B/YS-350B40	350	Brown
YS-400B/YS-400B40	400	Darkblue
YS-450B/YS-450B40	450	White
YS-500B/YS-500B40	500	Black
YS-550B/YS-550B40	550	Violet
YS-600B/YS-600B40	600	Blue
YS-700B/YS-700B40	700	Darkred
YS-800B/YS-800B40	800	Green
YS-1000B/YS-1000B40	1000	Gray
YS-1200B/YS-1200B40	1200	Yellow



YS-B.YS-B40

Model	Load Range(KGS)	Color
YS-9BS/YS9BS50	6~11	Yellow
YS-13BS/YS-13BS50	10~15	Red
YS-20BS/YS-20BS50	12~22	Azure
YS-30BS/YS-30BS50	22~35	Darkgreen
YS-45BS/YS-45BS50	30~50	White
YS-60BS/YS-60BS50	35~66	Blue
YS-80BS/YS-80BS50	60~85	Darkred
YS-100BS/YS-100BS50	85~110	Darkblue
YS-150BS/YS-150BS50	110~165	Azure
YS-200BS/YS-200BS50	165~210	Red
YS-250BS/YS-250BS50	210~260	Pink
YS-300BS/YS-300BS50	260~310	Antiquewhite

