




固安震®

YS-S · U TYPE RUBBER ISOLATOR

YS-S TYPE RUBBER ISOLATOR

Structure

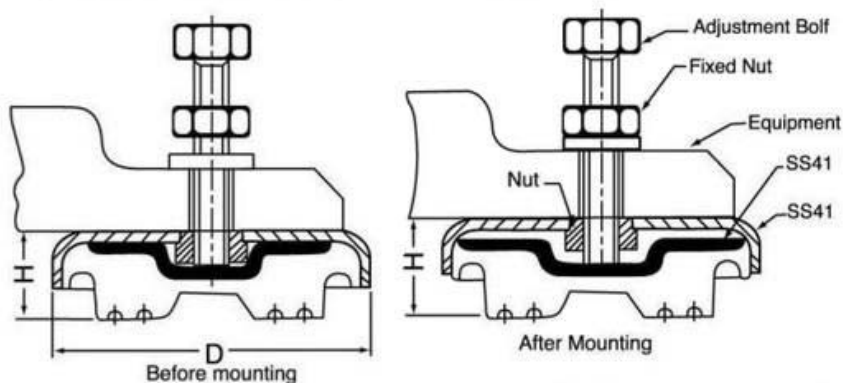

(m/m)

Features

YS-S type rubber isolator mostly suit for isolation and horizontal adjustment of machine tool, therefore this kind of rubber material mostly use oil proof glue, this type of rubber has the advantage of cheap and easily assembly.

Specification Table

MODEL	Proper Load (KGS)	Dimension(m/m)		Screw (mm)	
		D	H	Fine Screw Thread	Length
YS-76S	40-100	78	25	M10	60
YS-186S	100-250	103	35	M12	80
YS-376S	250-400	120	45	M14/M16M20	100
YS-376S-2P YS-1500S	1000-2000	120	45	M14/M16M20	100
YS-1296S	700-1500	168	45	M20	100
YS-1296S-2P YS-3000S	2000-4500	168	45	M24	150
YS-5000S	4000-6000	210	50	M24	150
YS-7000S	6000-8000	260	60	M30	150


YS-U TYPE RUBBER ISOLATOR

Structure



Features

The design of YS-U type rubber isolator can get lower natural frequency value from vertical isolation. But we have higher elasticity ratio in longitudinal direction can suit for small machine.

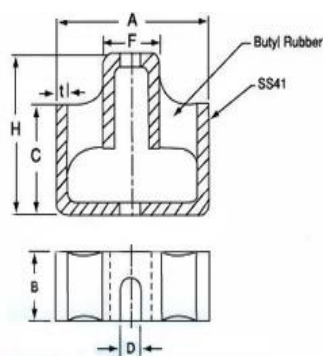

Specification Table

MODEL	Proper Load (KGS)	Dimension(m/m)					
		A	B	C	H	t	D
YS-18U	8-30	55	30	22	35	3.2	9
YS-32U	30-70	75	40	30	40	3.2	11
YS-42U	50-90	100	50	38	50	4.0	14
YS-68U	70-120	120	60	44	60	4.5	14



