
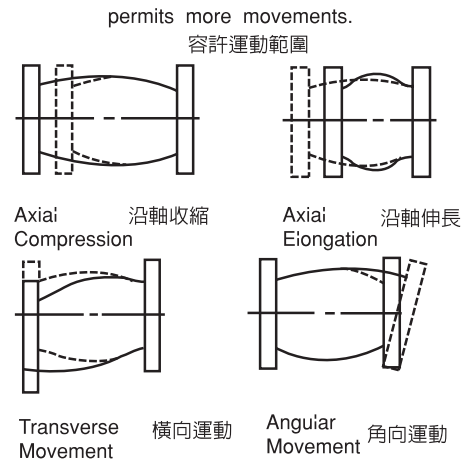


結構圖

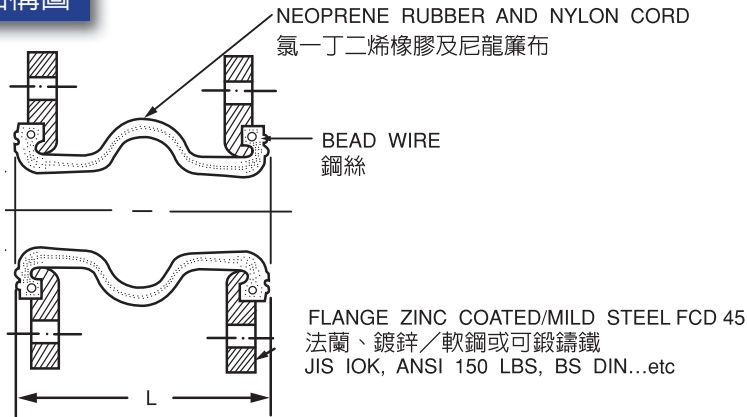

規格表

| 規格 | | 單球法蘭式 | | | | | | | | | 雙球法蘭式 | | 雙球由任式 | |
|-------|-----|--------------------|---------|------|-------------------|------------|------|----------|---------|------|----------|---------|----------|--------|
| | | 日規 FSF | | | 美規 FSFA | | | 歐規 FSFE | | | FTF | | FTU | |
| inch | mm | L (mm) | 沿軸伸長收縮 | 橫向運動 | L (inch) | 沿軸伸長收縮 | 橫向運動 | L (mm) | 沿軸伸長收縮 | 橫向運動 | L (mm) | 沿軸伸長收縮 | L (mm) | 沿軸伸長收縮 |
| ¾ | 20 | - | - | - | - | - | - | - | - | - | - | - | 203 | +6,-22 |
| 1 | 25 | - | - | - | 6 | +3/8,-½ | - | - | - | - | - | - | 203 | +6,-22 |
| 1¼ | 32 | 95 | +4,-8 | - | 6 | +3/8,-½ | - | 130 | +10,-14 | - | - | - | 203 | +6,-22 |
| 1½ | 40 | 95 | +4,-8 | - | 6 | +3/8,-½ | - | 130 | +10,-14 | - | - | - | 203 | +6,-22 |
| 2 | 50 | 105 | +5,-8 | ±6 | 6 | +3/8,-½ | ±6 | 130 | +10,-14 | ±6 | 175 | +15,-17 | 203 | +6,-18 |
| 2½ | 65 | 115 | +6,-12 | ±6 | 6 | +3/8,-½ | ±6 | 130 | +10,-14 | ±6 | 175 | +15,-17 | 203 | +4,-16 |
| 3 | 80 | 128 | +6,-12 | ±6 | 6 | +3/8,-½ | ±6 | 130 | +10,-14 | ±6 | 175 | +15,-17 | 203 | +4,-14 |
| 4 | 100 | 135 | +10,-18 | ±10 | 6 | +3/8,-5/8 | ±10 | 130 | +12,-16 | ±10 | 225 | +18,-20 | - | - |
| 5 | 125 | 170 | +10,-18 | ±10 | 6 | +3/8,-5/9 | ±10 | 130 | +12,-16 | ±10 | 225 | +18,-20 | - | - |
| 6 | 150 | 180 | +10,-18 | ±10 | 6 | +3/8,-5/10 | ±10 | 130 | +12,-16 | ±10 | 225 | +18,-20 | - | - |
| 8 | 200 | 205 | +14,-25 | ±14 | 6 | +3/8,-5/11 | ±14 | 130 | +12,-16 | ±14 | 325 | +21,-23 | - | - |
| 10 | 250 | 240 | +14,-25 | ±14 | 8 | +½,-¾ | ±14 | 130 | +14,-18 | ±14 | 325 | +21,-23 | - | - |
| 12 | 300 | 260 | +14,-25 | ±14 | 8 | +½,-¾ | ±14 | 130 | +14,-18 | ±14 | 325 | +21,-23 | - | - |
| 14 | 350 | 265 | +16,-25 | ±16 | 8 | +½,-¾ | ±16 | - | - | - | - | - | - | - |
| 16 | 400 | 265 | +16,-25 | ±16 | 8 | +½,-¾ | ±16 | - | - | - | - | - | - | - |
| 18 | 450 | 265 | +16,-25 | ±16 | 8 | +½,-¾ | ±16 | - | - | - | - | - | - | - |
| 20 | 500 | 265 | +16,-25 | ±16 | 8 | +½,-¾ | ±16 | - | - | - | - | - | - | - |
| 工作壓力 | | 15kg/cm² (1¼"-12") | | | 15kg/cm² (1"-12") | | | 15kg/cm² | | | 10kg/cm² | | 8kg/cm² | |
| 爆破壓力 | | 60kg/cm² (1¼"-12") | | | 60kg/cm² (1"-12") | | | 60kg/cm² | | | 40kg/cm² | | 15kg/cm² | |
| 真空額定值 | | 750mmHg | | | 750mmHg | | | 750mmHg | | | 600mmHg | | 400mmHg | |
| 角向運動 | | 15° | | | 15° | | | 15° | | | 15°-25° | | 20°-40° | |
| 溫度 | | -10°-115°C | | | | | | | | | | | | |

※ 中間橡膠加強環為選配零件。

※ 橫向運動 (單球): 2"-3" (±6mm); 4"-6" (±10mm); 8"-12" (±14mm); 14"-24" (±16mm)。

