




固安震®

YS-GS·G型橡膠式避振器

YS-GS·G TYPE RUBBER ISOLATOR

AIR VALVE AIR INSIDE
氣門阻 空氣室

YS-GS Type

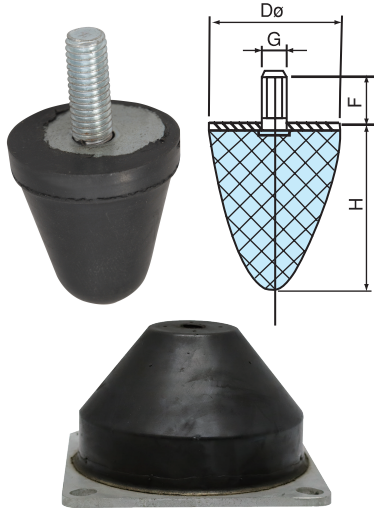




YS-GS TYPE RUBBER ISOLATOR

Features

- ⊙ Easy to install with secure stability ◦
- ⊙ Made of butyl rubber for superior vibration isolation ◦
- ⊙ Metal components and hardware are electroplated ◦
- ⊙ Extended rubber cushioning ensures excellent shock absorption ◦


Technical Data

Specification	Dimensions(mm)							
	Loads kgs	ØD	H	G	F	d	A	P
YS-90GS	20-140	32	36	M8	20	-	-	-
YS-230GS	40-300	54	61	M8	35	-	-	-
YS-510GS	80-700	72	87	M12	37	-	-	-
YS-1500GS	700-1500	60	95	M14XP2.0	-	L18XW13	180	60

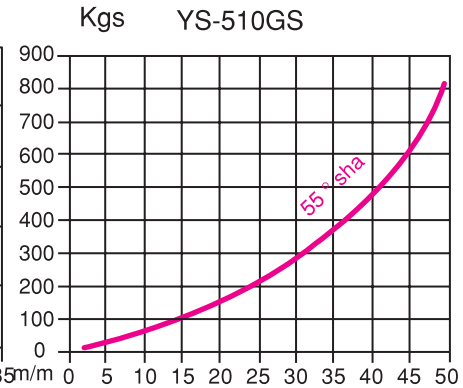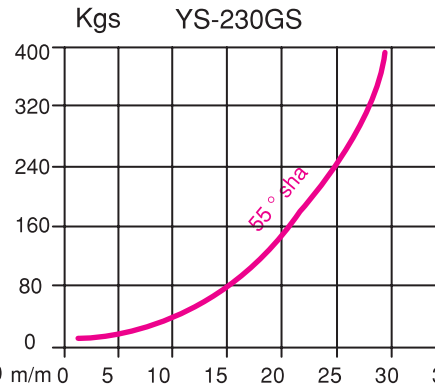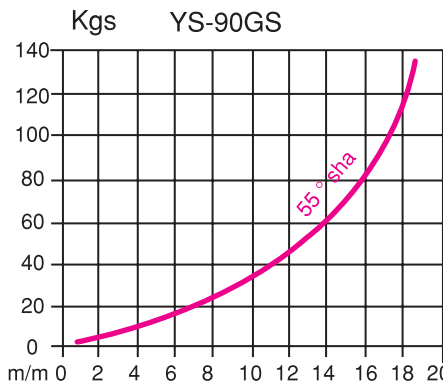

Rubber Mounts

YS-G Type

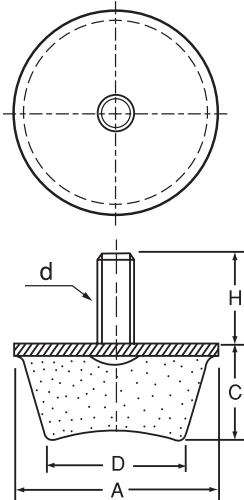

YS-G TYPE RUBBER ISOLATOR

Features

- ⊙ Quick and easy to install ◦
- ⊙ The rubber bottom features a special recessed design, suitable for machinery that does not require fixed flooring, such as computer optical instruments and equipment ◦
- ⊙ Metal components/hardware are electroplated ◦



Technical Data

Specification	Load (KGS)	Dimensions (mm)				
		A	D	C	H	d
YS-8G	1-10	16	12	15	16	M6
YS-28G	10-30	25	21	20	18	M6
YS-48G	20-50	32	27	25	22	M8
YS-68G	40-75	40	35	25	32	M10
YS-118G	50-130	54	49	25	32	M10
YS-328G	130-330	72	68	40	32	M12
YS-598G	330-600	112	108	50	36	M14
YS-998G	600-1200	158	150	50	60	M16

