

# » 2000-06 W220 Front Refurbished Shock MERCEDES-BENZ Airmatic Air Suspension





**Features:**

- Quality Guaranteed: The fatigue life persists up to millions of cycles without failure.
- Products net weight: 6.7kg ; Gross weight: 8kg
- Packing Dimensions: 745\*200\*100 / 29"\*8"\*4" (L\*W\*H)



## » Sleeve Type

Customized sized order acceptable,  
working days:60 ~90days

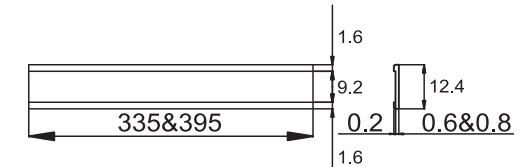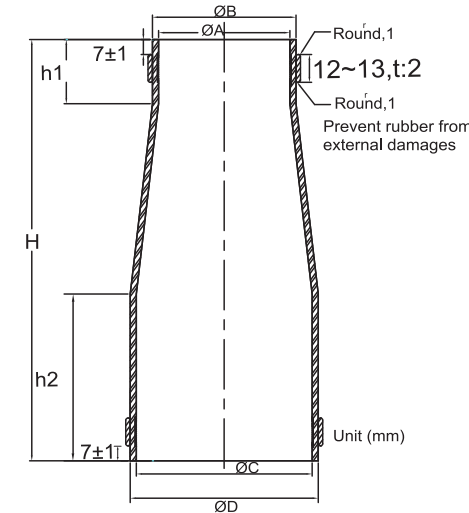

Gasket Suitable for  
YS-08S,YS-10S,YS-11S,YS-14S&YS-17S

YS-AIR	Specification	φ mm				Dimensions(mm)			Nylon cord Reinforced Ply
		OE Reference	A	B±0.3	C	D±0.3	h1	h2	
YS-01S	FUSO	58	63.5	81.5	87	28	72	190±2	2
YS-02S	FUSO	58	63.5	81.5	87	28	52	165±2	2
YS-03S	FUSO	58	63.5	81.5	87	20	45	145±2	2
YS-04S	FUSO, HINO	79.2	84.5	113	118.5	26	44	136±2	2
YS-05S	Seat	69.5	75	69.5	75	-	-	186±2	2
YS-06S	Man, Scania	75	80.5	75	80.5	-	-	316±2	2
YS-07S	Seat	48	53.5	78	83.5	22	78	186±2	2
YS-08S		82	85.8	82	85.8	-	-	200±2	2
YS-09S		90	93.8	90	93.8	-	-	270±2	2
YS-10S		86	89.8	86	89.8	-	-	135±2	2
YS-11S		82	85.8	82	85.8	-	-	268±2	2
YS-12S	Scania	75	80.5	75	80.5	-	-	360±2	2
YS-13S	Volvo	80	85.5	100	105.5	28	72	445±4	2
YS-14S		86	89.8	86	89.8	-	-	230±2	2
YS-15S	<b>Benz W211,Front COVER</b>	120	125.8	120	125.8	-	-	75±2	2
YS-16S		93	98.6	122	127.6	40	72	305±2	2
YS-17S		92	95.8	92	95.8	-	-	128±2	2
YS-18S	Audi All Road	87	92.6	108	113.6	40	72	312±2	2
YS-19S	TAHOE	54	59.6	67	72.6	120	120	320±2	2
YS-20S	<b>Benz W211,Rear</b>	96	101.6	96	101.6	-	-	210±2	2
YS-21S	GL/ML W164 Front	96	101.6	126	131.6	40	72	376±2	2
YS-22S		82	85.8	82	85.8	-	-	285±2	2
YS-23S	<b>W164</b>	98	103.6	122	127.6	40	72	305±2	2
YS-24S	BMW X5	91	96.4	133	138	-	-	295±2	2
YS-25S	Benz 220,front	86	90	122	125.6	28	28	135±2	2
YS-26S	Benz 220 Rear	82	86	97	100.6	28	28	268±2	2
YS-27S	W211,Front	86	89.6	116	109.6	28	28	230±2	2
YS-28S	W221,Rear	89	93.1	124.5	128.1	35	35	156±2	2
YS-29S	W221,Front	89	93.1	124.5	128.1	28	28	132±2	2
YS-30S	Audi A8	80	83.6	119	122.5	28	28	230±2	2
YS-31S		82	86	97	100.6	28	28	278±2	2
YS-32S		82	86	97	100.6	30	30	283±2	2
YS-33S	BMW F02 F01	89	93.1	124.5	128.1	40	40	170±2	2
YS-34S		80	83.6	119	122.5	25	25	210±2	2
YS-35S	<b>#251</b>	98	103.6	122	127.6	50	90	350±2	2
YS-36S		80	83.6	119	122.5	40	40	180±2	2
YS-37S		75	80	84	89	15	15	230±2	2
YS-38S		62.4	67.4	67	72	15	15	192±2	2

**Features**

